

❖ **TM-1327GE/TMC-1327GE** Progressive Scan CCD




- *2/3" progressive scan IT CCD (ICX285AL/ICX285AQ)*
- *1392(H) x 1040(V) @ 30 fps*
- *6.45 μm square pixels*
- *Compact 51 x 51 x 85 mm housing*
- *High speed point-to-point connection, up to 1Gbps*
- *Gigabit Ethernet output (8-bit/10-bit selectable)*
- *Maximum dynamic range control through built-in look-up table (8-bit only)*
- *User-definable variable partial scan*
- *Full-frame shutter to 1/21,000 sec.*
- *Asynchronous reset, no-delay shutter*
- *High gain CCD output and near IR sensitivity*
- *Extensive software developer's kit (SDK)*
- *Monochrome or color*

GigETM
VISION


Specifications for TM-1327GE/TMC-1327GE

Specifications		TM-1327GE/TMC-1327GE
Sensor		2/3" progressive scan interline transfer CCD
Active area		8.98mm x 6.71mm
Active pixels		1392 (H) x 1040 (V)
Cell size		6.45 μm x 6.45 μm
Readout mode		1392 (H) x 1040 (V) @ 30 Hz User-definable partial scan
Synchronization		Internal/External auto switch HD/VD, 4.0 Vp-p impedance 4.7K Ω VD= 30 Hz ± 5%, non-interlace HD=31.59 kHz ± 5%
Pixel clock		55.00 MHz
S/N ratio		>52 dB
Sensitivity	Mono Color	0.4 lux f=1.4 (no shutter) @ 30 fps, 3.2 lux f=1.4 (no shutter) @ 30 fps,
Video output		Gigabit Ethernet (8-bit/10-bit)
Color (RMC/TMC-1327 only)		Raw Bayer output for host-based interpolation
Gamma		Programmable LUT (Gamma 1.0 std)
Shutter speed (programmable)		1/30 to 1/21,000 in increments of 31.65 μs
Lens mount		C-mount (use 2/3" format lenses)
Power		12V DC ± 10%, 430 mA (typical at 25° C)
Operating temperture		-10° C to 50° C
Vibration		7 Grms (10 Hz to 2000 Hz) Random
Shock		70 G, 11 ms, half-sine
Dimensions (H x W x L)		51 mm x 51 mm x 85 mm
Weight		212 g (without tripod)


Dimensions

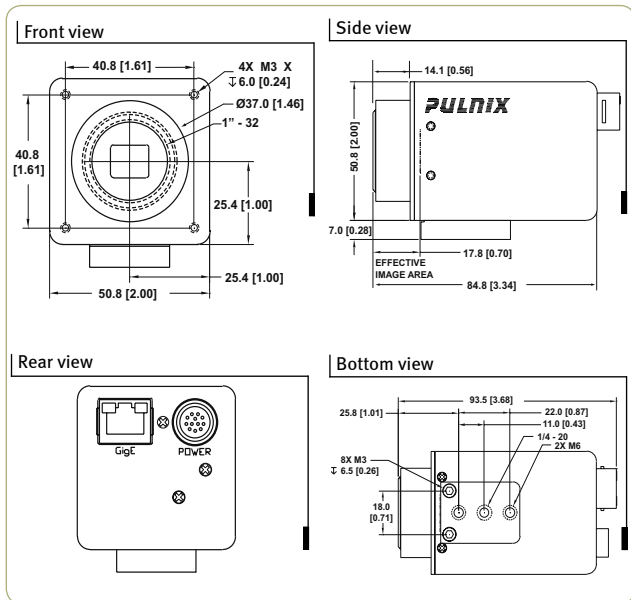

Spectral Response

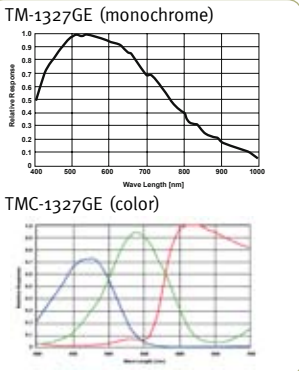

Connector Pin-out

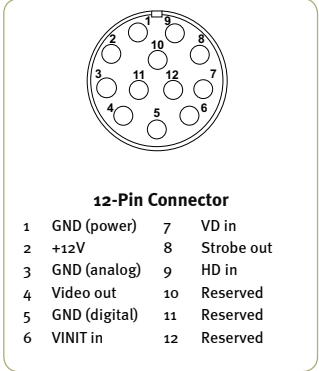

GUI Interface

A user-friendly graphical user interface (GUI), provided as part of the camera's extensive software development kit (SDK), allows users to control various camera functions, including:

- Shutter control for manual async. and pulse width control
- Gain control
- A/D reference voltage control
- Save settings
- Load settings
- Report settings
- LUT setting and graphic display
- Scanning mode selection and Option selections



The SDK also provides functions for controlling the grabbing of images, and configuring local I/Os, by means of an integrated API and a set of powerful C++ classes. Changes in the camera's acquisition modes automatically update the API for easy image acquisition. CPU usage is only a few percent, thanks to the TCP/IP offload engine.

Software available for download at www.jai.com

Ordering Information

Camera	
Lead Processing	TM-1327GE (mono), TMC-1327GE (color)
RoHS Compliant	RM-1327GE (mono), RMC-1327GE (color)
Optional Functions	
Internal IR Cut Filter Added	OP3-1
Optical Filter Removal	OP3-2 (color only)
Configure to 15 fps	OP7-5
Optional Accessories (must be ordered separately)	
Power Cable	12P-02S
Power Supply	PD-12UUP series (includes power connector)

Europe, Middle East & Africa
 Phone +45 4457 8888
 Fax +45 4491 8880

Asia Pacific
 Phone +81 45 440 0154
 Fax +81 45 440 0166

Americas
 Phone (Toll-Free) 1 800 445 5444
 Phone +1 408 383 0300

Visit our web site on www.jai.com



Company and product names mentioned in this datasheet are trademarks or registered trademarks of their respective owners. JAI'S cannot be held responsible for any technical or typographical errors and reserves the right to make changes to products and documentation without prior notification. 10459 Rev A.03.21.2007